




Outdoor Lightweight Fixed LED Display

VH SERIES

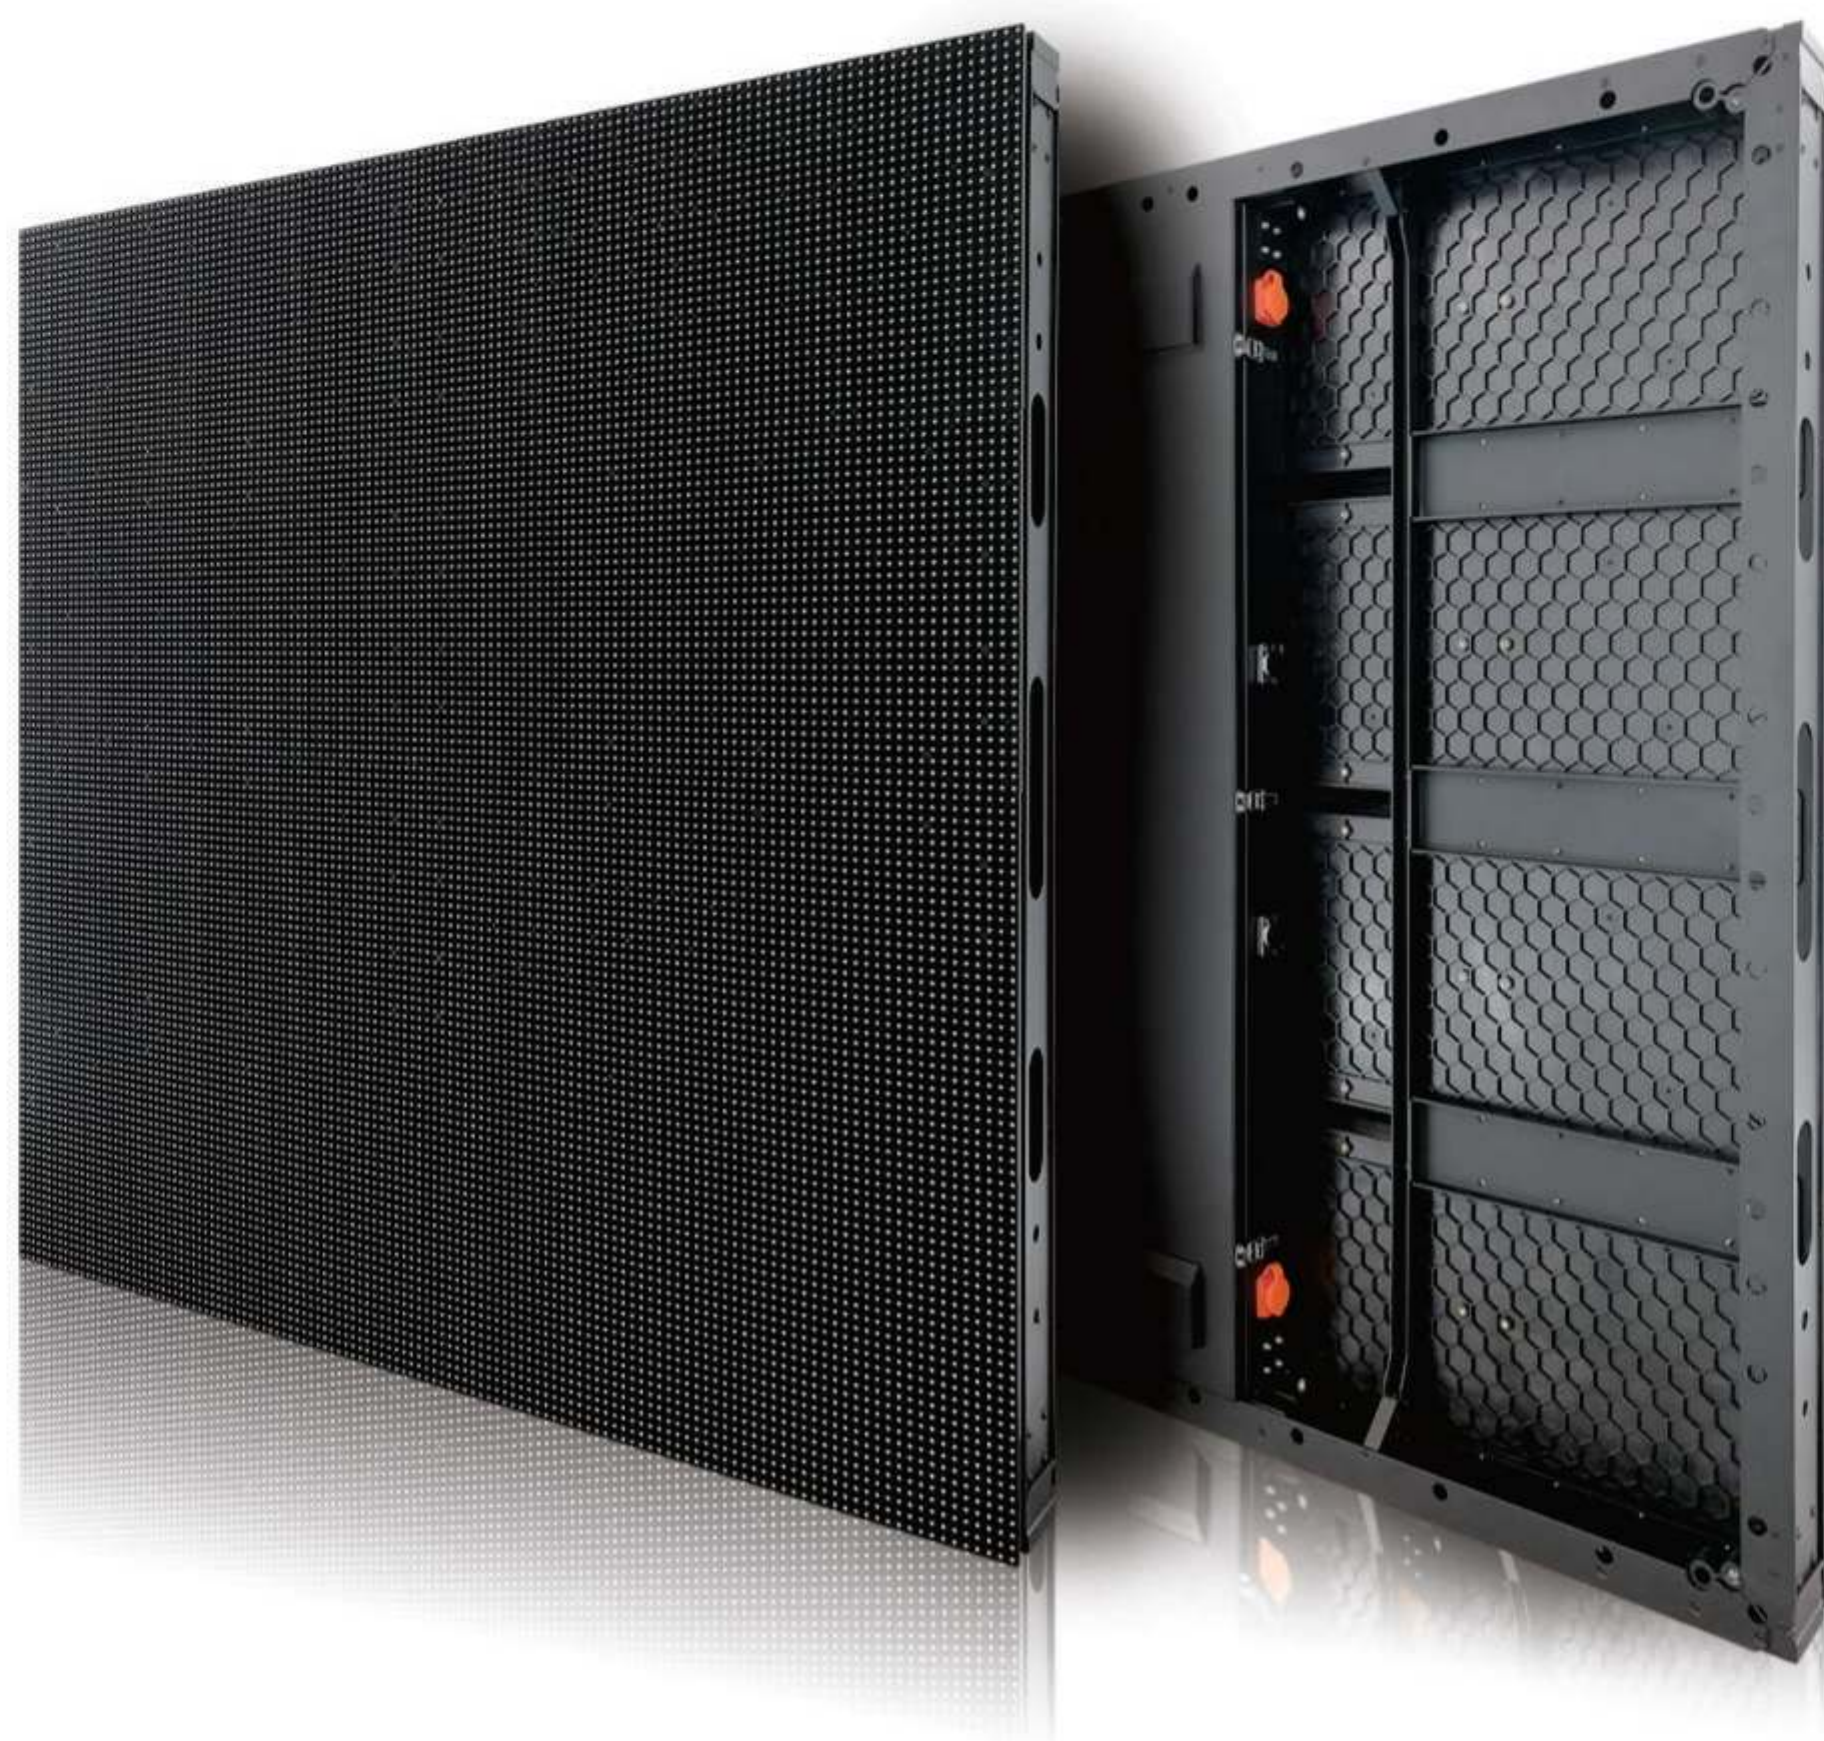

8500nits/m²



22KG/m²



75mm



IP65/IP54



Full Front
Maintenance



Full Front
Installation

Vision Display Pvt. Ltd.

Product Images




Product Features

01 **Cabinet Size and Weight**


Cabinet Size: 1000mm*1000mm*75mm

Cabinet Weight: 22 kg/pcs

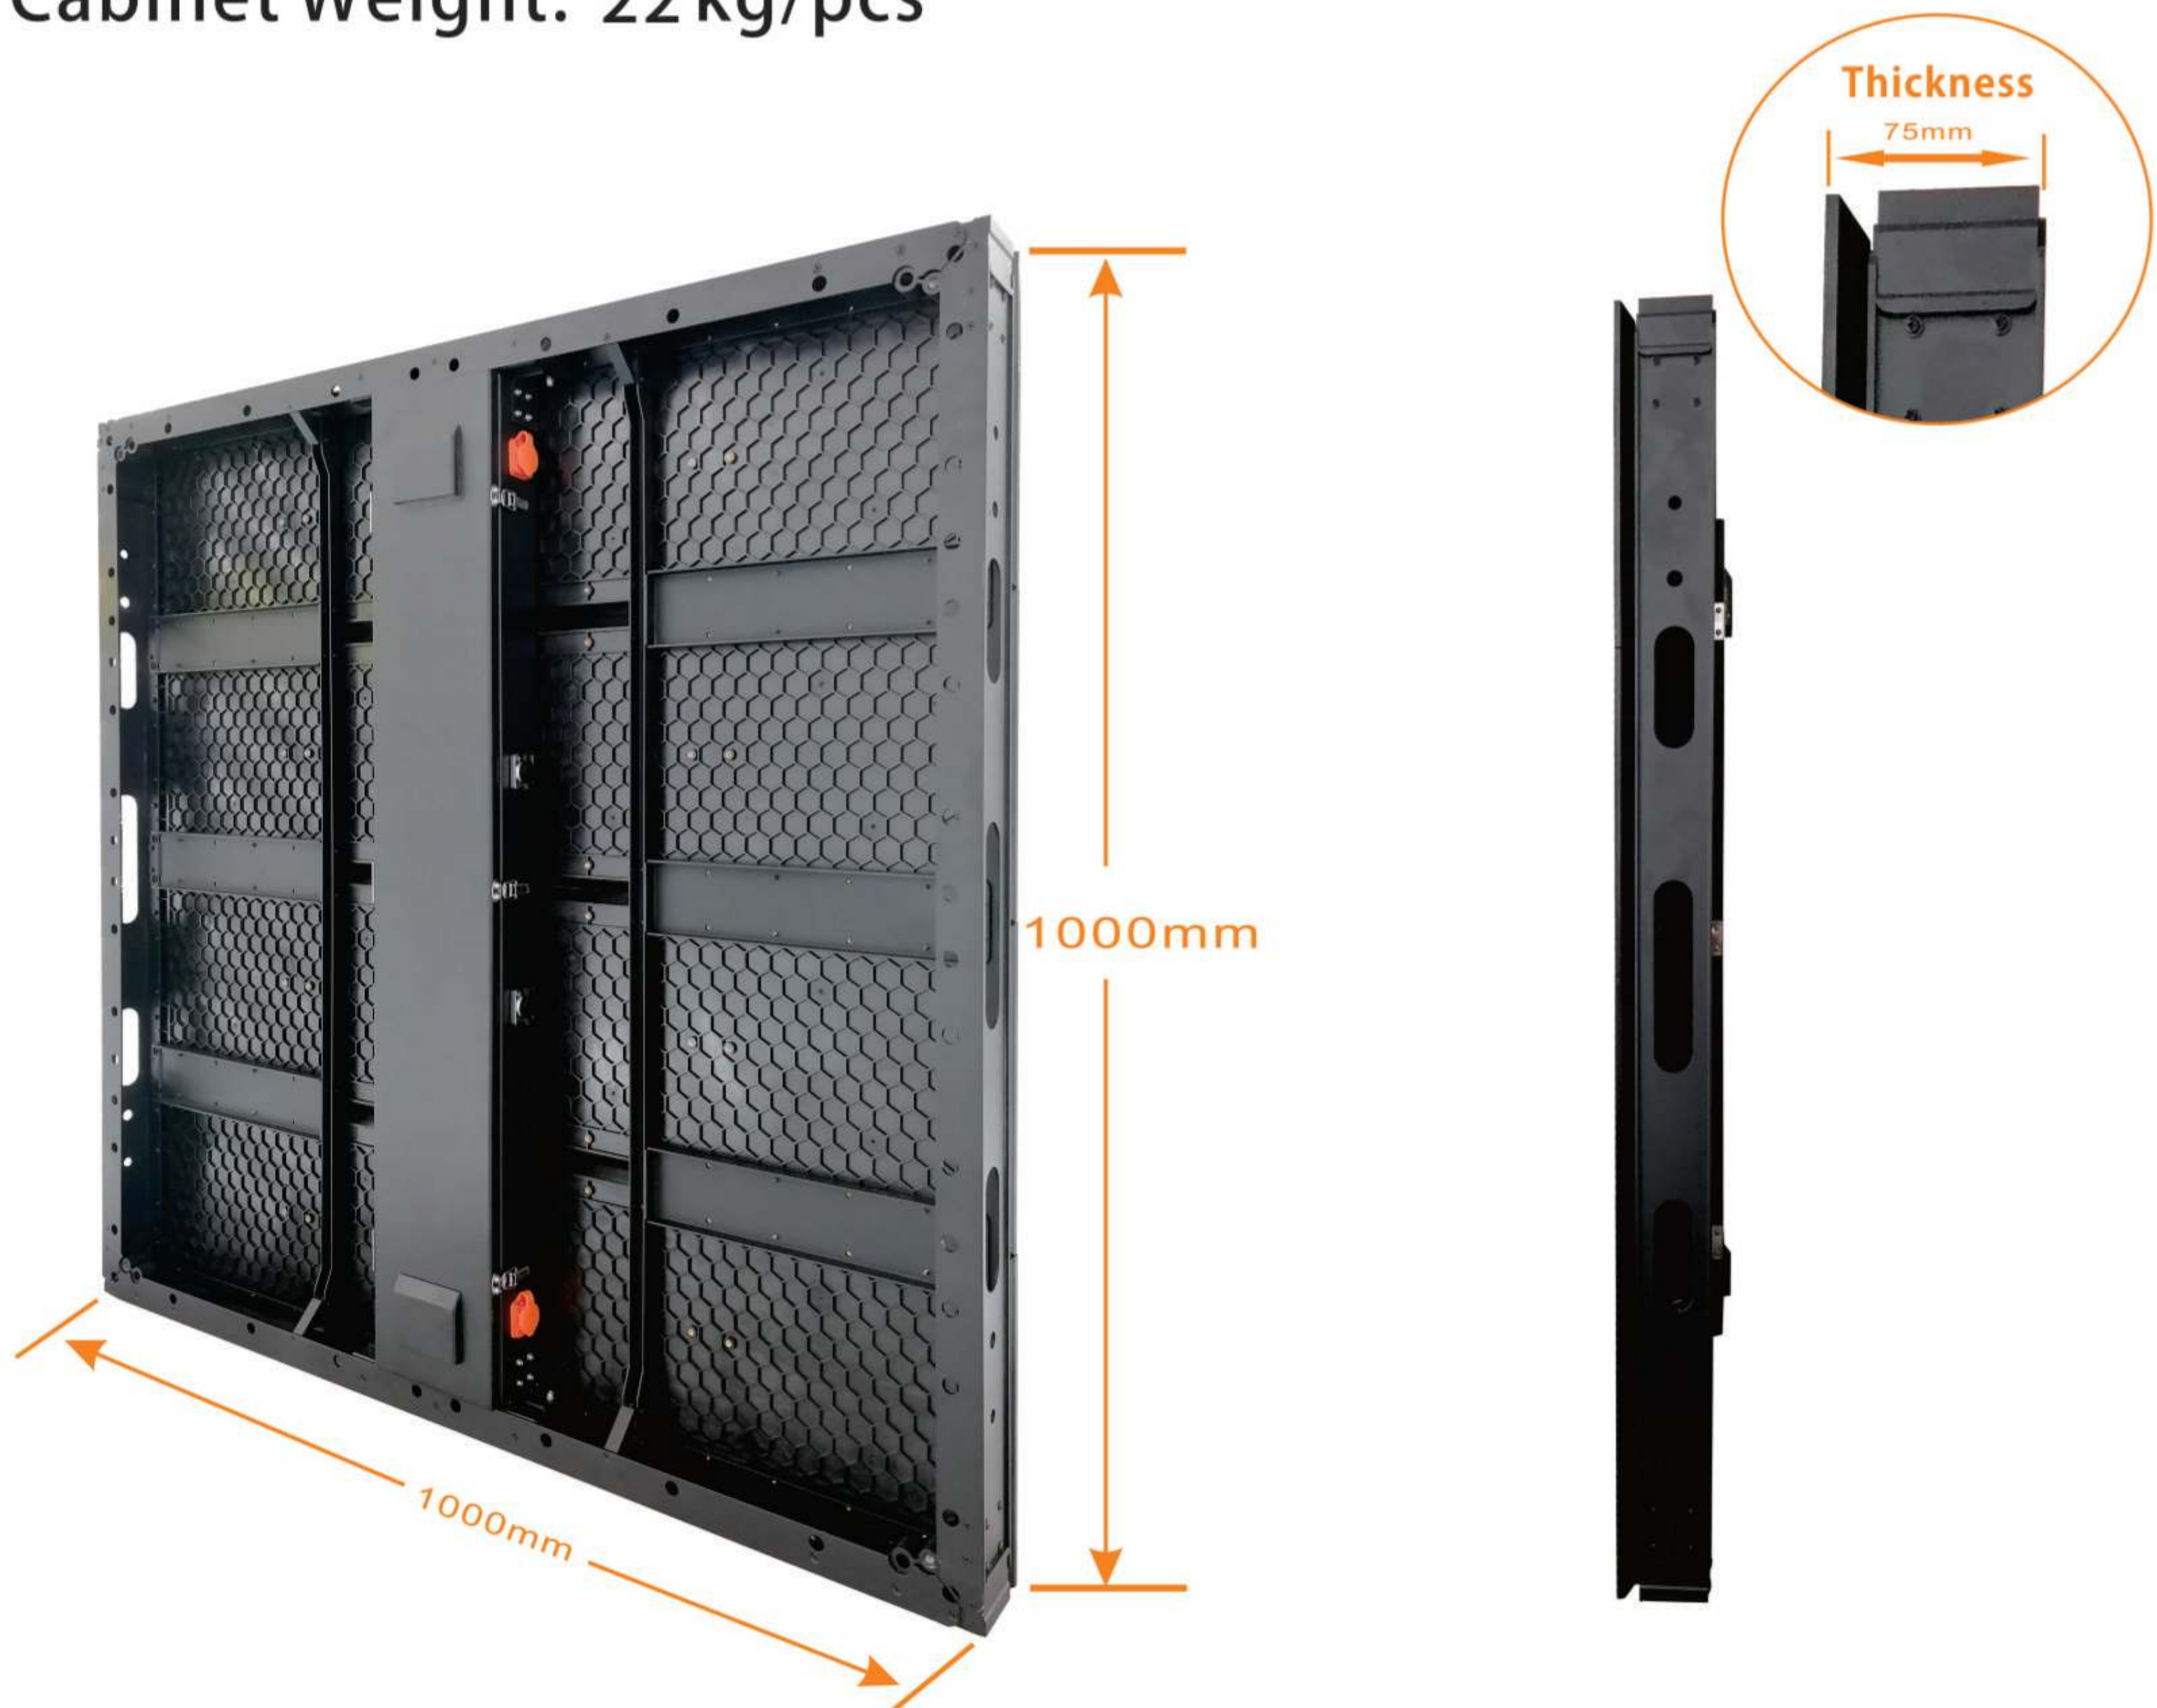

02 Right - angled Connection

The edges of each module are designed to be 45 degrees, it is easier to make right-angled connection and realize glasses-free 3D display.

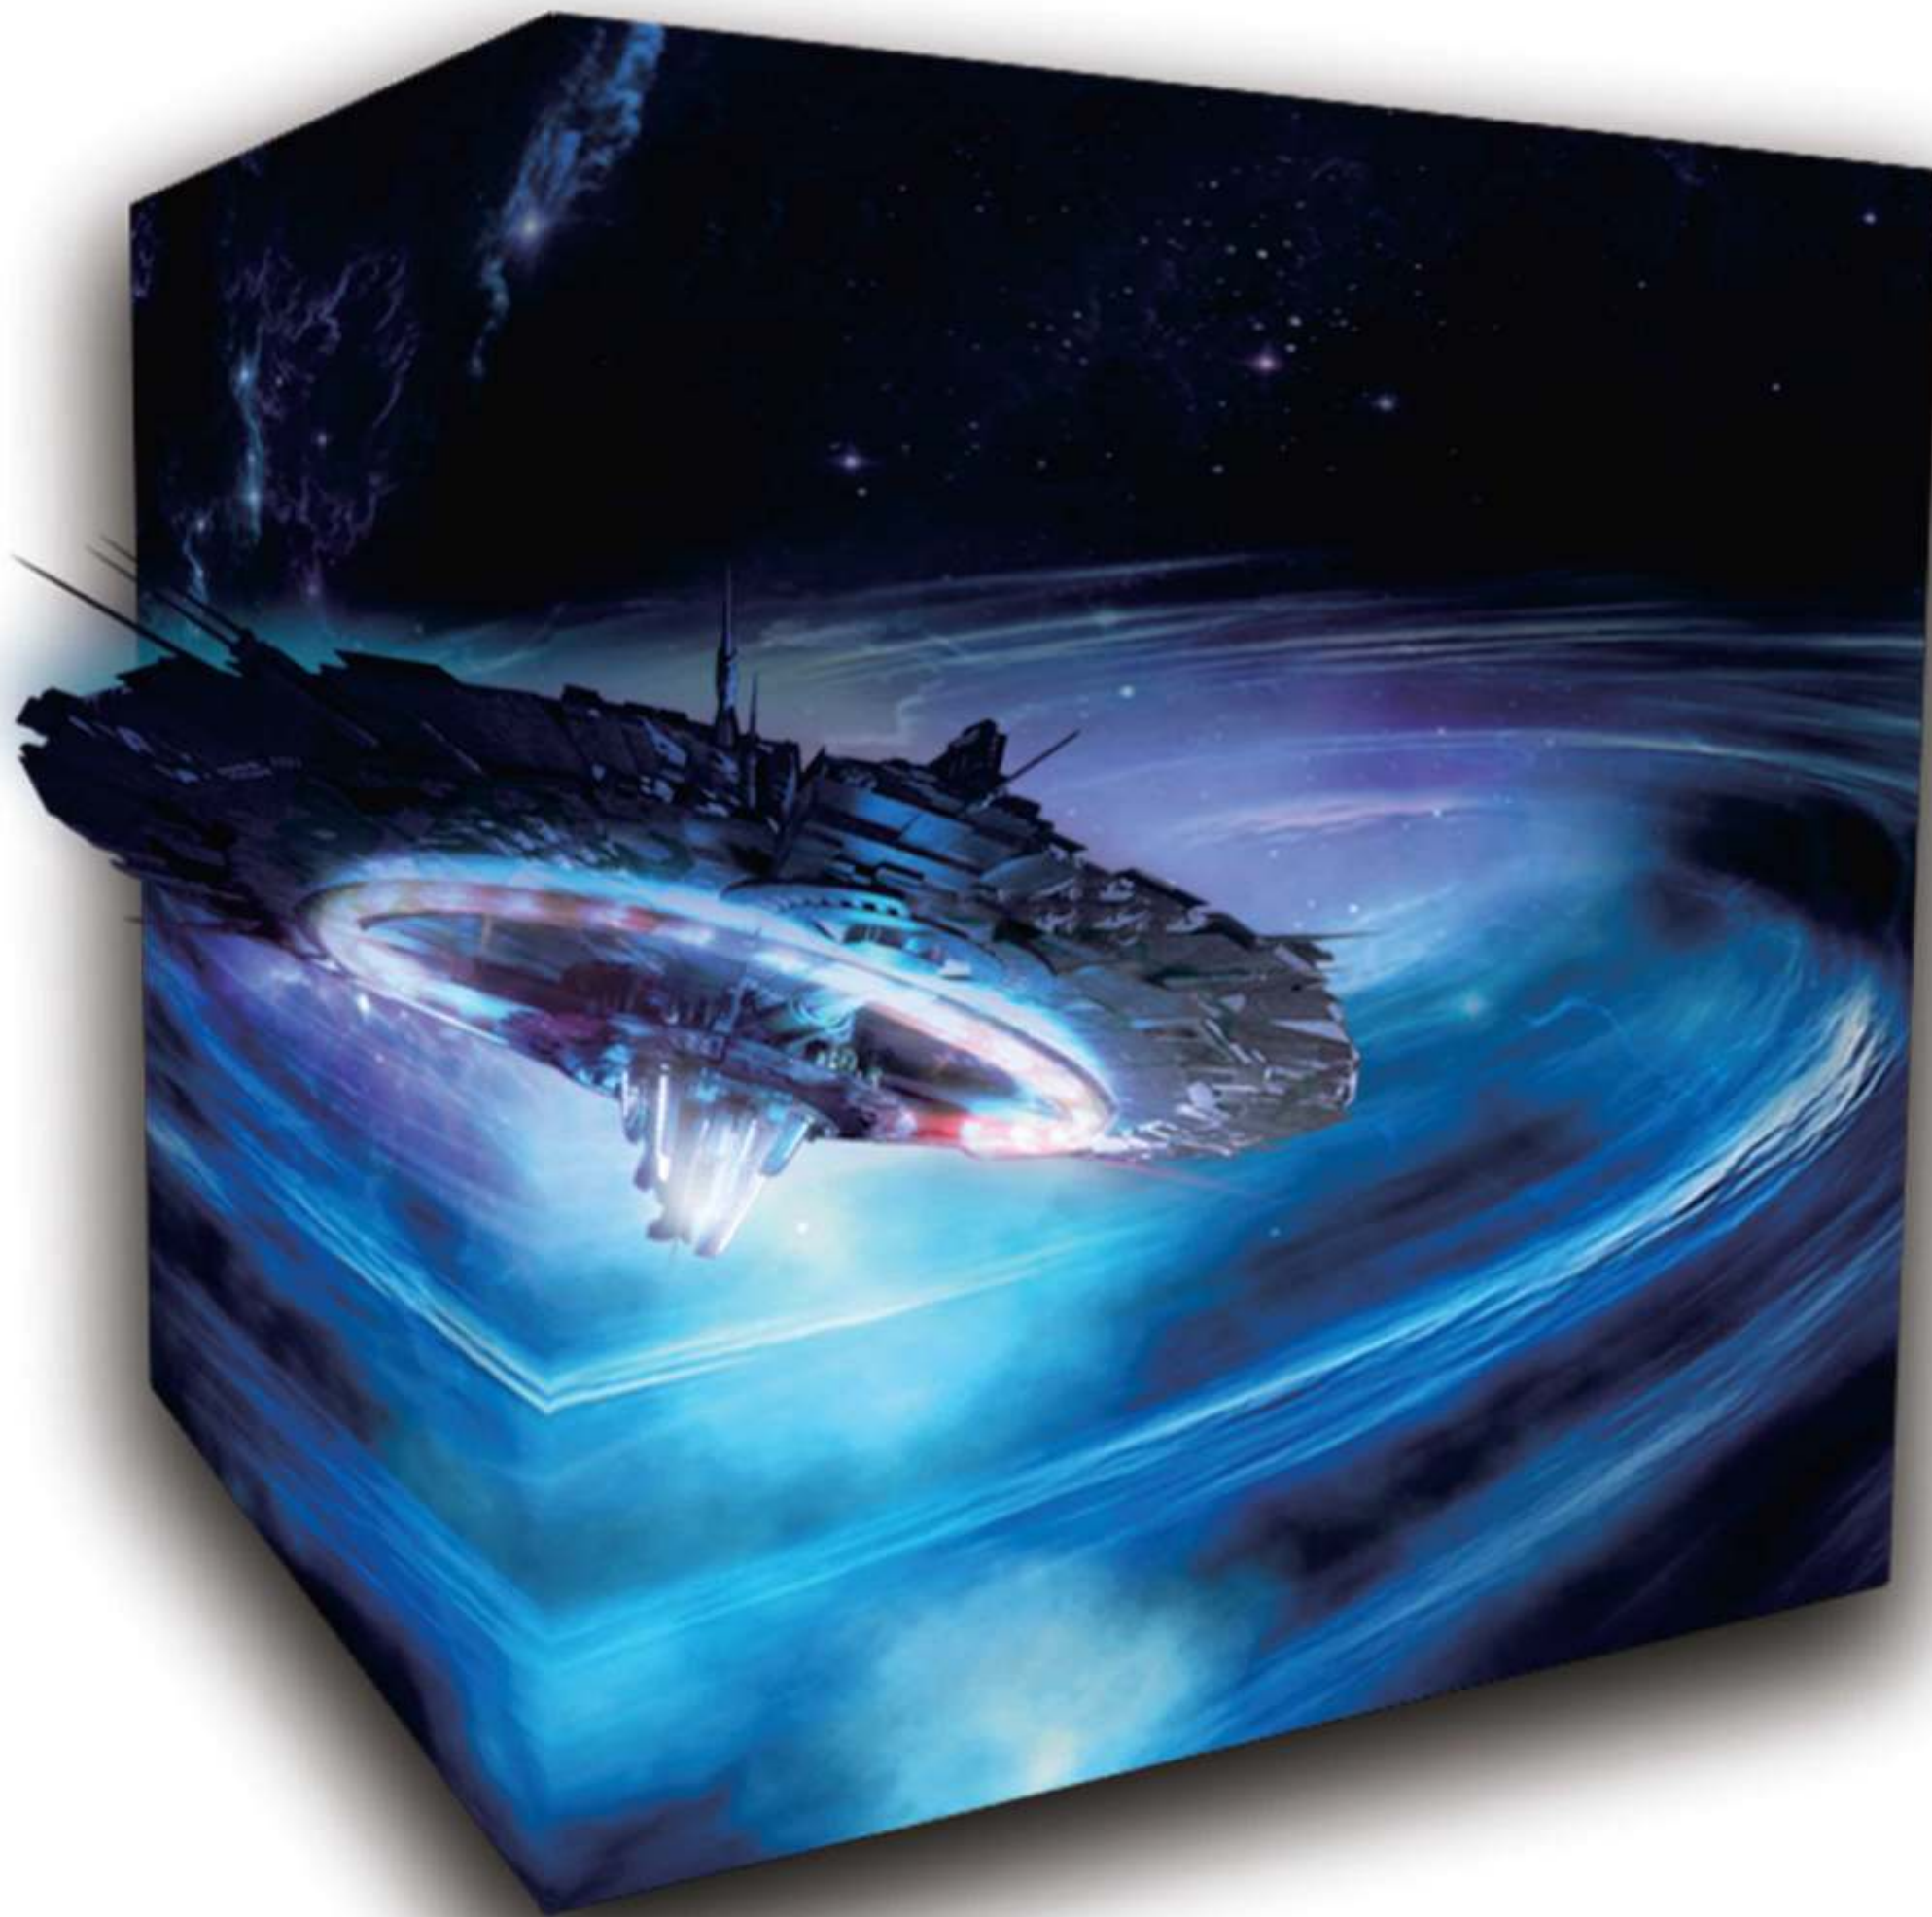

Cabinet



Frame



Module

03 Full Front Installation and Maintenance

VHseries can be installed in a variety of outdoor environments because it can be either front or rear installed and maintained.



1.Remove all the modules



2.Rotate the control box 180 degree

Modules, power supply, receiving card, all the parts can be front maintained.

04 IP65/IP54 Waterproof


With IP65/IP54 waterproof, VH series meet the requirements of outdoor working environment.

IP Rating **IP65**



05 Naked Installation


VH series can be installed naked without cover and air conditioner because of its IP 65 waterproof rate and good heat dissipation design. It requires only a simple steel structure for installation.

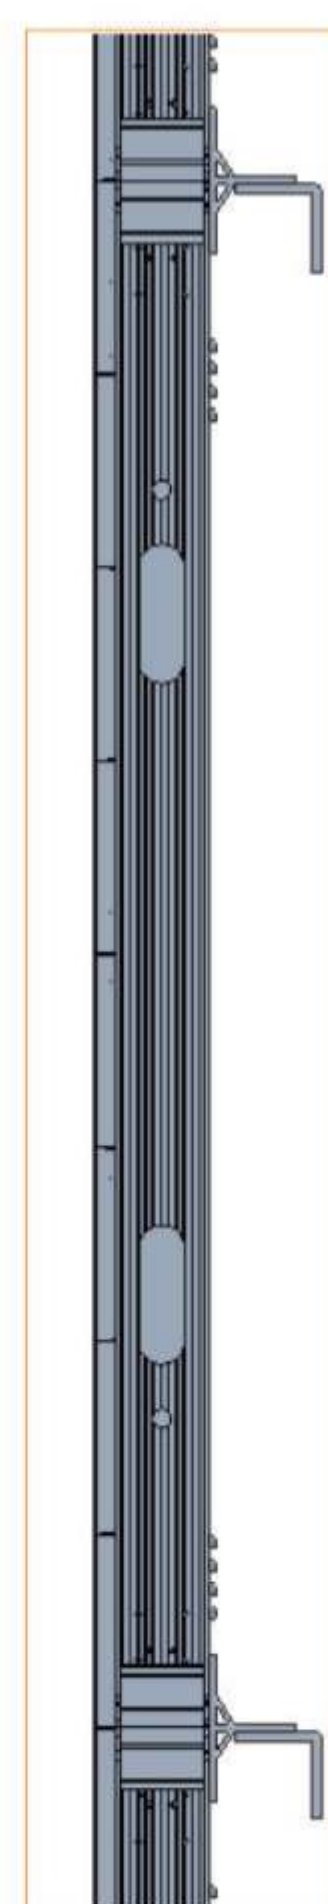

Steel Structure: Standard Aluminum Square Steel

06 Shared Frame and Control Box


Same cabinet is compatible with different pixel pitch modules and it saves procurement costs.

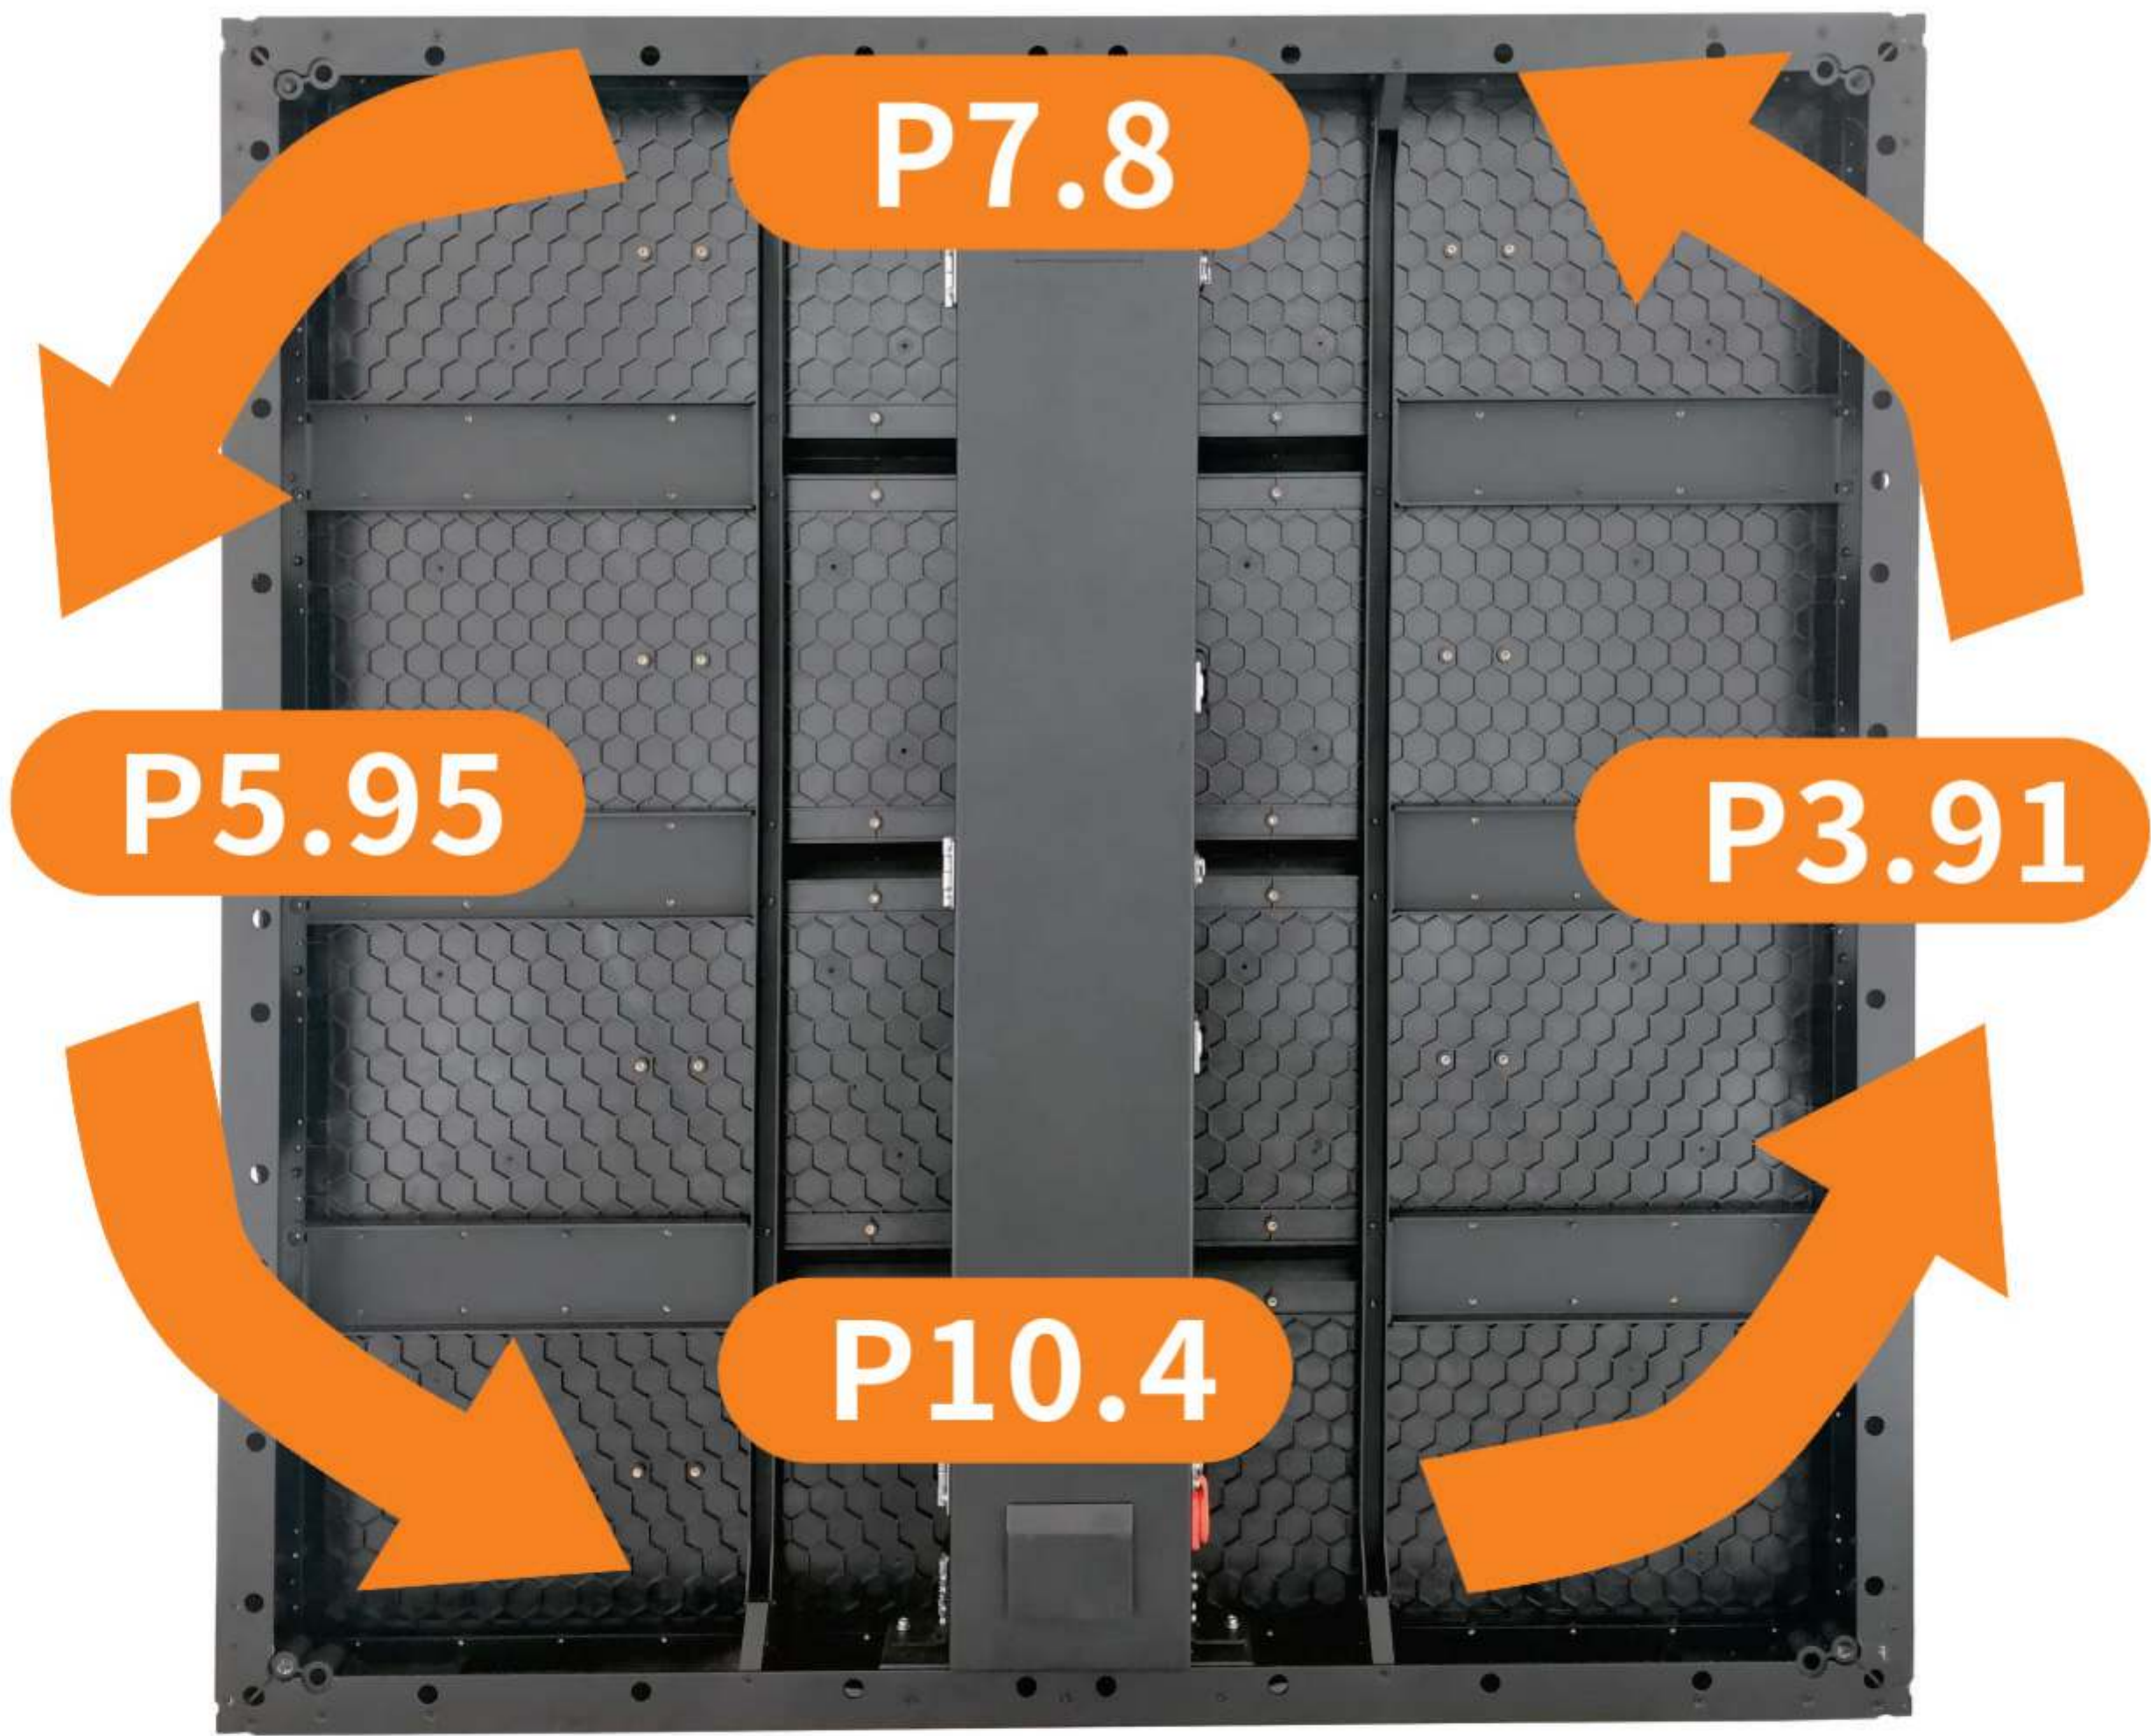

Notice: one cabinet can only use modules with the same pixel pitch at the same time,a mix up of different pixel modules is not permitted.

07 Standard size

Cabinet size is 1000mm*1000mm and it is exactly one square meter. The screen size can be measured in multiples of one square meter.

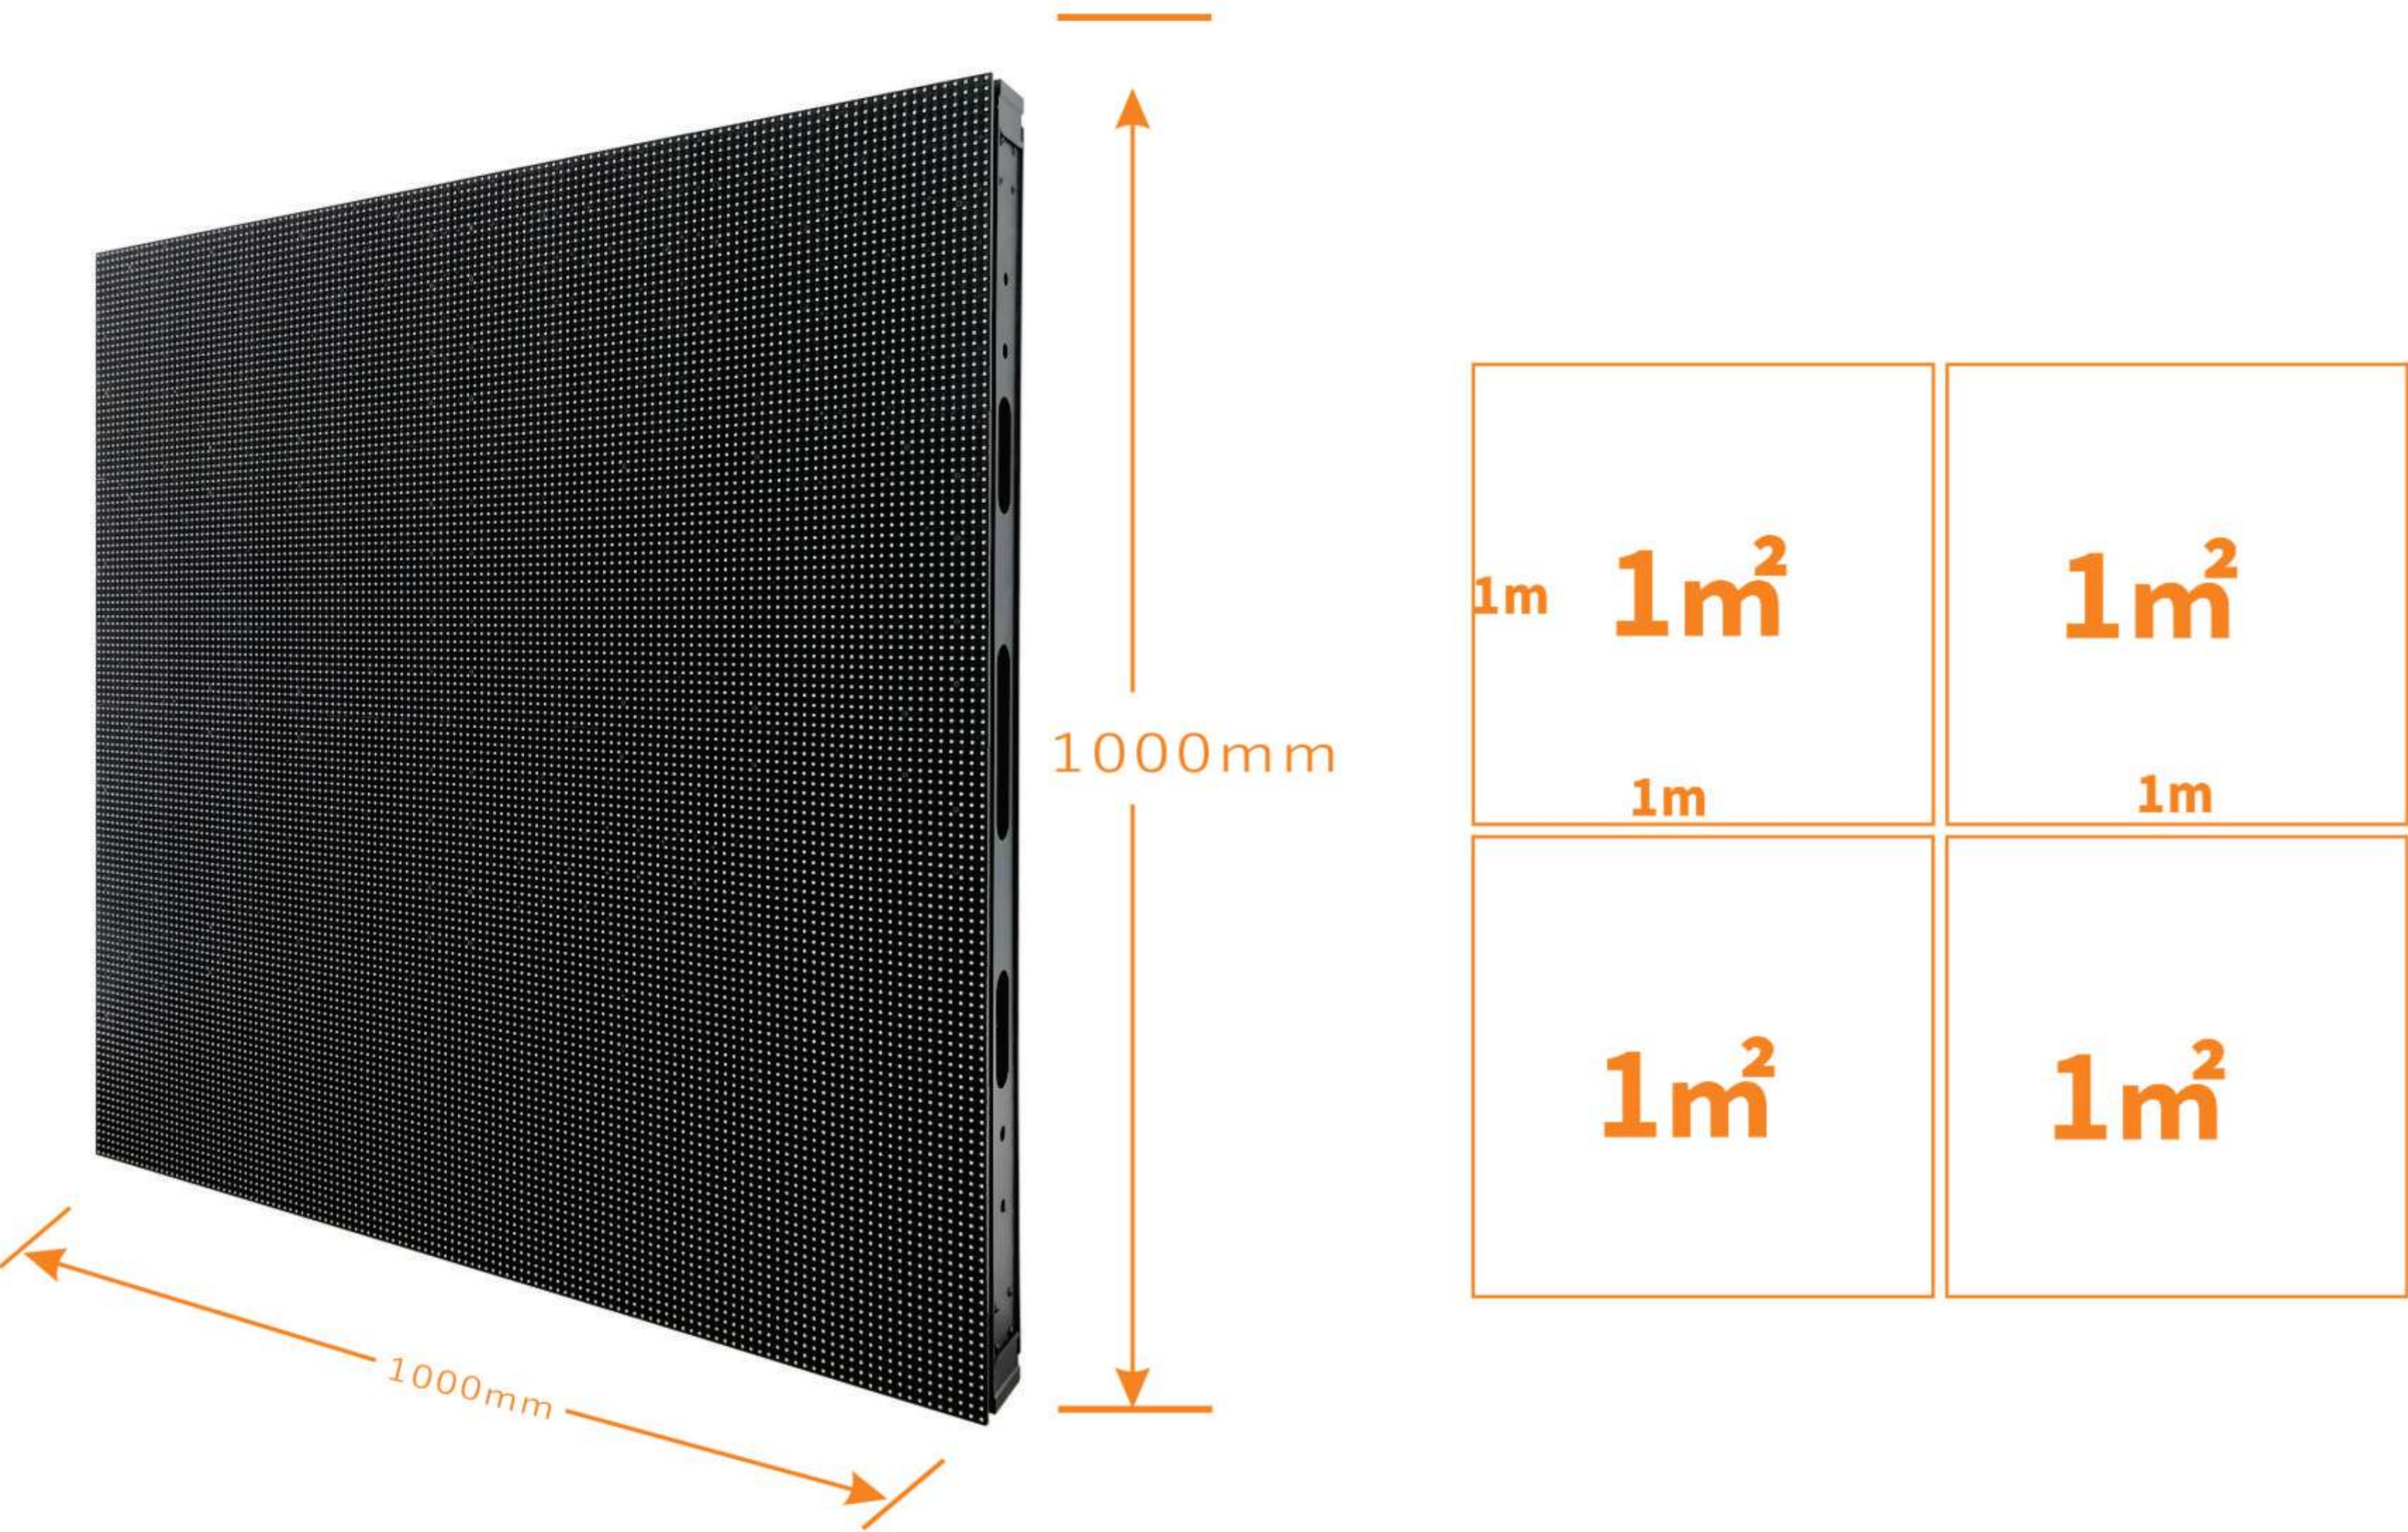

08 High Refresh Rate and Brightness Level

VH series brightness is up to 6000~9000nits and refresh rate can reach 3840Hz, ensuring that it can also have high contrast and present a clear picture in the highlighted environment .



Low refresh rate



3840Hz refresh rate

Product Parameters

Parameters	VH3.9	VH3.9*7.8	VH5.9	VH5.2*10.4	VH7.8	VH10.4	VH10.4D
Pixel Pitch(mm)	3.91	3.91*7.81	5.95	5.2*10.4	7.8	10.4	10.4
LED Configuration	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727	SMD3535	DIP346
Module Size(mm)	500*250	500*250	500*250	500*250	500*250	500*250	500*250
Module Resolution	128*64	128*32	84*42	96*24	64*32	48*24	48*24
Cabinet Size(mm)	1000*1000*75						
Cabinet Resolution	256*256	256*128	168*168	192*96	128*128	96*96	96*96
Cabinet Weight(kg/m²)	22	22	22	22	22	22	22
Contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
Brightness(cd/m²)	6000-7500	5500-6500	6500-8500	6500-8000	6500-8000	6500-8500	8000-15000
Refresh Rate(Hz)	≥3840	≥3840	≥3840	≥3840	≥3840	≥3840	≥3840
IP Rating(Front/Rear)	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54

Vision Display Pvt. Ltd.



Mobile:+91 9819484847 / +91 8928445751
Customer Care PAN India: 1800-123-3656
Website: www.visiondisplay.in
E-mail: enquiry@visiondisplay.in
Add: S4, Siddharth' Nagar Building No. 5,
Next Gayatri Mata Mandir, Borivali East,
Mumbai - 400066, Maharashtra, India